

Disconnect Terminal Block



DTS-30

M4/5.5mm², 30A

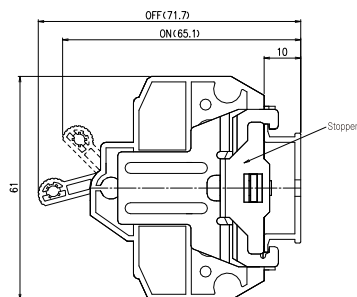
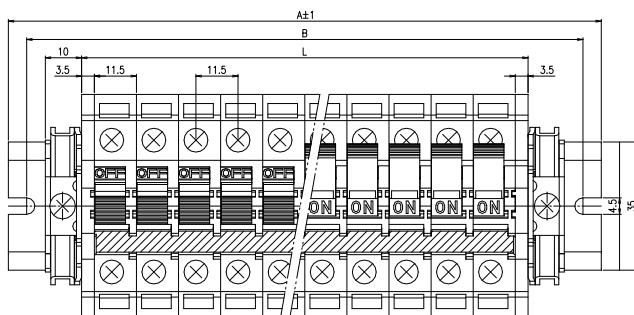


DTS-30 improves efficiency of maintenance and circuit switching work.


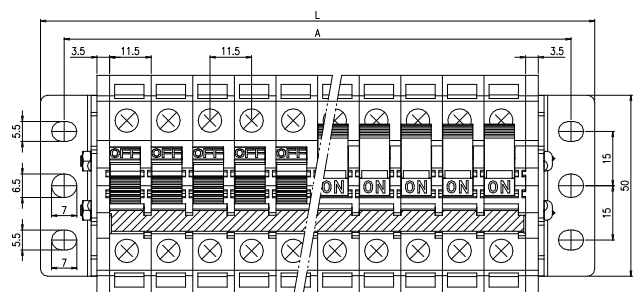
Up-screw type	TOGI original up-screw terminal block suits both round-type and y-type solderless terminals. Its structure prevents a loss of screws by dropping and the short-circuit accidents.
Finger-protect structure	Finger-protect structure prevents electric shock accidents.
High-voltage type	· Rated insulation voltage: 1,000V AC/DC · Rated impulse withstand voltage: 8KV · Withstand voltage: 3,500V AC / min.
Environmental durability	· Flammability rating: UL94-V0 · Comparative tracking Index (CTI): 175-250V (UL category=3) · Relative Thermal Index (RTI): 120°C · Hot Wire Ignition (HWI): 15-19sec
AgNi contact	AgNi contact point has excellent Arc resistance and welding resistance.

Turn the main power off before switch ON/OFF the circuits. No performance guaranteed if switch ON/OFF the circuit while the main power is turned on.

TOYOGIKEN CO.,LTD.

DTSL-30-□P (for DIN35mm rail) ※assembled at the factory and shipped**Dimensions (mm)**

No. of poles (P)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Total length of terminal blocks (L)	18.5	30.0	41.5	53.0	64.5	76.0	87.5	99.0	110.5	122.0	133.5	145.0	156.5	168.0	179.5
Rail mounting hole pitch (A)	50	70		90		110		130		150		170		190	210
Mounting rail dimension (A)	60	80		100		120		140		160		180		200	220
No. of poles (P)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Total length of terminal blocks (L)	191.0	202.5	214.0	225.5	237.0	248.5	260.0	271.5	283.0	294.5	306.0	317.5	329.0	340.5	352.0
Rail mounting hole pitch (A)	230	250	270		290		310		330		350		370		390
Mounting rail dimension (A)	240	260	280		300		320		340		360		380		400

DTSK-30-□P (for direct mounting) ※assembled at the factory and shipped**Dimensions (mm)**


No. of poles (P)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Total length of terminal blocks (L)	—	61.2	72.7	84.2	95.7	107.2	118.7	130.2	141.7	153.2	164.7	176.2	187.7	199.2	210.7
Mounting hole pitch (A)	—	48.1	59.6	71.1	82.6	94.1	105.6	117.1	128.6	140.1	151.6	163.1	174.6	186.1	197.6
No. of poles (P)	16	17	18	19	20										
Total length of terminal blocks (L)	222.2	233.7	245.2	256.7	268.2										
Mounting hole pitch (A)	209.1	220.6	232.1	243.6	255.1										

Rating

Rated insulation voltage	Applicable wire/Rated current	Terminal screw	Tightening torque
1,000V AC/DC	5.5mm ² / 30A	M4×7.5L	1.2~1.8 N·m

Specifications

Withstand voltage	3,500V AC / min.
Insulation resistance	200MΩ or more (at 500V DC mega)
Ambient temperature	-40°C~+90°C (No freezing or condensations)
Relative humidity	45~85%
Contact resistance	5mΩ or less
Rated impulse withstand voltage	8kV
Compliant standards	JIS C 8201-7-1 / IEC60947-7-1 NECA C 2811

Applicable solderless terminal**Materials**

Body	PBT (Black)	UL94V-0
Lever	PC (Yellow)	
Push rod	PBT (Black)	UL94V-0
Conductive plate	Copper alloy (Ni plating)	
Moving contact	Copper alloy (Ni plating)	
Terminal screw	Steel (Zn+trivalent chromate processing)	
Up-washer	Steel (Zn+trivalent chromate processing)	
Spring for moving contact	Spring Steel (Zn+trivalent chromate processing)	
Spring for push rod	Spring Steel (Zn+trivalent chromate processing)	
Spring for Up-washer	Spring Steel (Zn+trivalent chromate processing)	
End plate	PBT (Black)	UL94V-0
Name plate	PVC (White)	
Lock plate	Steel (Zn+trivalent chromate processing)	
Lever lock	POM	
Lever interlocking pin (2P)	PBT (Black)	UL94V-0
Lever interlocking pin (2P~6P)	SUS	

Parts Name (weight / pc or sets)

Terminal block	End plate AB set	Name plate	Mounting rail	Stopper	Lock plate	Lever lock	Lever interlocking pin (2P)	Lever interlocking pin (2~6P)
DTS-30 (32g)	DTS-30L/A,B sets (15g)	AM-10	DAV-4	HDV-3 (25g)	DTS-K1 (25.5g)	DTS-30KS (0.5g)	DTS-302P (0.2g)	DTS-P4x10 (1g)
sales lot (30)	sales lot (10set)	sales lot (50) Dimension (0.5x10Wx1200L)	sales lot (100)	sales lot (50)	—	sales lot (10pcs/bag)	sales lot (10pcs/bag)	sales lot (10pcs/bag)

CAUTION for safety

- For your safety, please read this catalogue carefully before use of product.
- Products on this catalog may limit purpose and place of use, and also may require regular maintenance. Please confirm with your distributor or the maker directly.
- For your safety, all electrical wiring must be done by a qualified electrician.

BEFORE PURCHASE

- Product designs and specs may change without notice.
- Product color may slightly differ from this catalog.
- Please contact us for the product details and drawings.



Please contact our technical support team for product inquiries.

P.T. Nikkatsu Electric Works

Jl. Cimuncang No. 70 Bandung 40125 Telp. (022) 720 8088 (6 Lines) Fax: 720 6956 - 727 6000
Website: <https://www.pt-nikkatsu.com> e-mail: marketing@pt-nikkatsu.com

***TOGI* TOYOGIKEN CO.,LTD.**

<http://www.togi.co.jp> E-mail: info@togi.co.jp

Headquarters, Factory

4-8-7 Gongencho, Osachi, Okaya-shi, Nagano-ken, Japan 394-0081