


Sinar

SNR-CT series

Dry Type

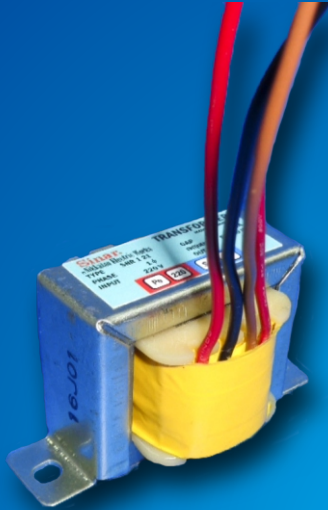

SPECIFICATIONS

PHASE	: 1 Ø
FREQUENCY	: 50/60 Hz
PRIMERY VOLTAGE	: 220 V
SECONDARY VOLTAGE	: 9-12-15-18-24 V
CLASS OF INSULATION	: F
STANDARD	: JIS - C5310

TYPE	CAP (VA)	AMPERE (A)	DIMENSION (mm)							WEIGHT (Kg)
			L	W	H	LP	WP	Hw	φ A X B	
SNR1-21	1 VA	0.11	62	38	36	52	19.5	300	4X5	0.25
SNR5-21	5 VA	0.60	62	38	36	52	19.5	300	4X5	0.25
SNR10-21	10 VA	1.11	62	38	36	52	19.5	300	4X5	0.25
SNR15-21	15 VA	1.70	62	38	36	52	19.5	300	4X5	0.25

